



door innovation


INDUSTRIAL SI75




INDUSTRIAL ROLLER SHUTTERS (SI75)

TYPICAL USES: WAREHOUSING, FACTORIES, FARM BUILDINGS


One of the most commonly used Roller Shutters offering a clear height and width access through external openings. This is a proven design used for decades on a diverse range of openings on Industrial and Retail applications giving a durable and economical solution. Available in coloured polyester powder coating, plastisol or standard galvanised finish.

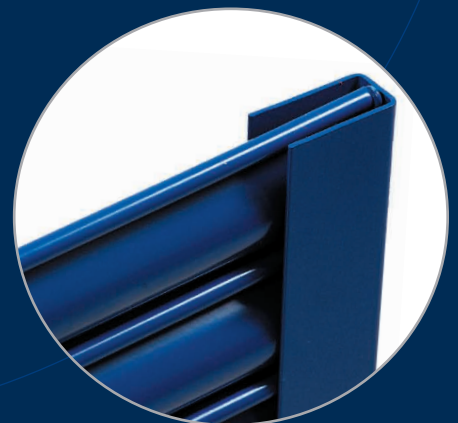

INDUSTRIAL ELECTRICAL OPERATION FACE FIX

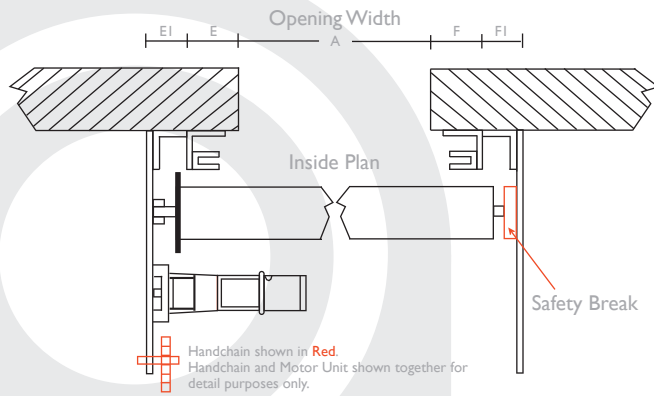

INDUSTRIAL ELECTRICAL OPERATION SIDE FIX

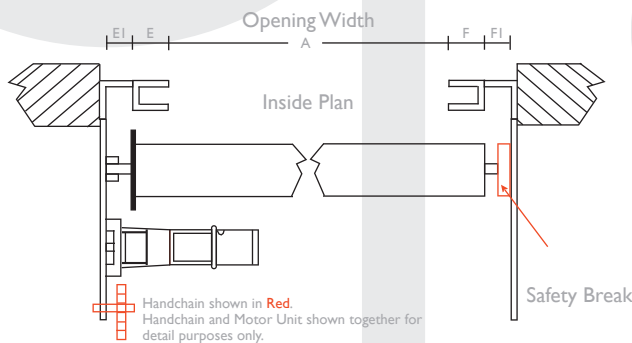

INDUSTRIAL ROLLER SHUTTERS (SI75)

BARREL

For openings up to 6 metres wide. Constructed from 139mm outside diameter x 126mm inside diameter steel tube, mounted on 25mm steel shaft, with steel bearings at each end. Incorporating high speed bearings. Finish one coat of Red Oxide paint.

CURTAIN

Constructed from 75mm wide curved section, interlocking galvanised steel laths. Finished with a galvanised 'T' section bottom rail.

SIDE GUIDES

Constructed from 3mm x 63mm guide channel bolted to 75mm x 50mm steel angle.

GEARING

By means of continuous galvanised hand chain, driving mild steel sprockets connected by high speed roll chain.

ELECTRICAL OPERATION

By means of 1/2 HP up to 2HP geared motor complete with rotary limits and emergency hand chain mechanism. 3 push button controls as standard.

ELECTRICITY SUPPLY

240 Volt 1 Phase, 415 Volt 3 Phase

OPTIONAL EXTRAS


Plastisol Coated Laths, Powder Coated Laths, Wicket Gate, Hood, Bottom Draught Strip, Heavy Duty Weather Seal, Remote Control, Fascia.

LEGISLATION COMPLIANT

Adhering to new legislation requiring all roller shutters to comply with the Construction Products Directive (C.P.D), all doors manufactured by BL Shutters are designed, manufactured and independently tested to meet the requirements of BS EN 13241 : 2003. For more information visit www.blshutters.co.uk.


door innovation


INDUSTRIAL SHUTTER PROFILE /
SAFETY BREAK DETAIL

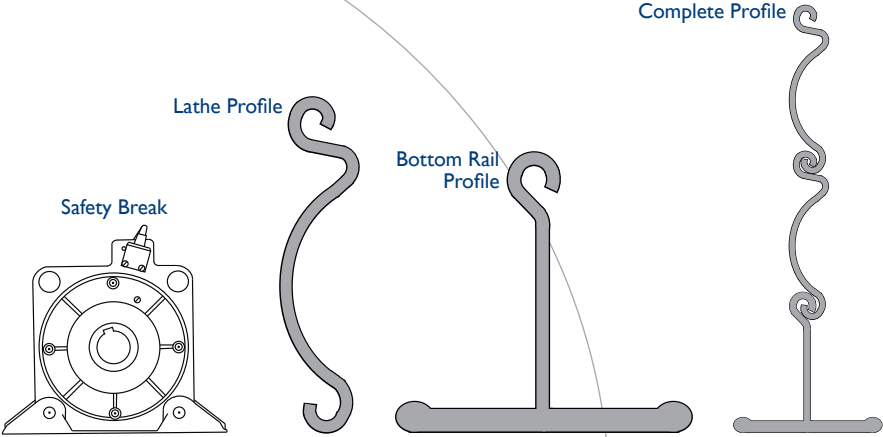

Note: Applications show Electrical Operation. For manual operation position of handchain is shown is **Red**. Drawings show doors left hand geared. Right hand arrangements available. Openings to flush faced. All dimensions in millimetres.

A	B	C	D	E	F	EI	FI
Up to 4000	Up to 3600	550	350	75	75	75	75
Up to 6000	Up to 4500	600	400	75	75	75	75
Up to 6000	Over 5000	650	450	75	75	75	75
Up to 6000	Over 6000	Sizes on Application					
Up to 6000							

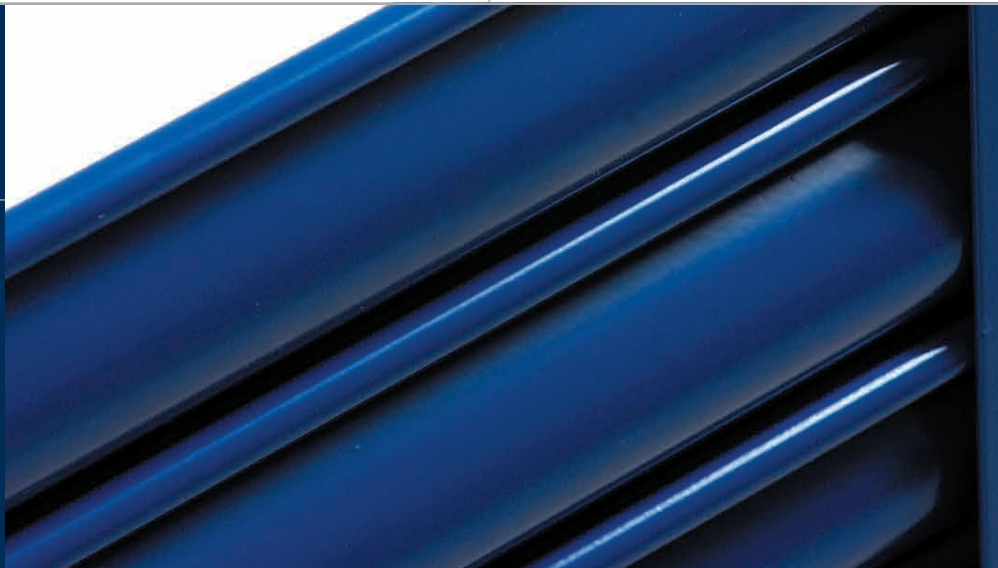



● COMMERCIAL ROLLER SHUTTERS



● ALUMINIUM ROLLER SHUTTERS




● FIRE ROLLER SHUTTERS



● PVC SCREENS & DOORS


● HINGED SECURITY DOORS



● INSULATED SECTIONAL DOOR

● INDUSTRIAL INSULATED DOORS

● GARAGE ROLLER DOORS



ADDITIONAL PRODUCTS

BL SHUTTERS LTD

Carn Road, Carn Industrial Area, Portadown, Co. Armagh, BT63 5WG

T : 028 3833 3551 F : 028 3835 0204

E : sales@blshutters.co.uk

www.blshutters.co.uk

